


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHHA PANEL REPRESENTED HERE IS 5/8" NICHHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHHA PRODUCT THICKNESSES.
3. MINIMUM 24 GA. METAL PEMB PANELS.
4. PEMB MANUFACTURER TO DETERMINE GIRT ELEVATION/SPACING.
5. NICHHA DEFLECTION CRITERIA FOR METAL PANELS: $L/120$.
6. FASTEN NICHHA CLIPS, STARTER TRACK, AND FACE FASTENERS @ 12" O.C. WITH #10 SCREWS.
7. UTILIZE THROUGH-WALL Z FLASHING TO CAP NICHHA AWP. SYSTEM THICKNESS DEPENDS ON PANEL TYPE AND RANGES FROM 26-31MM.

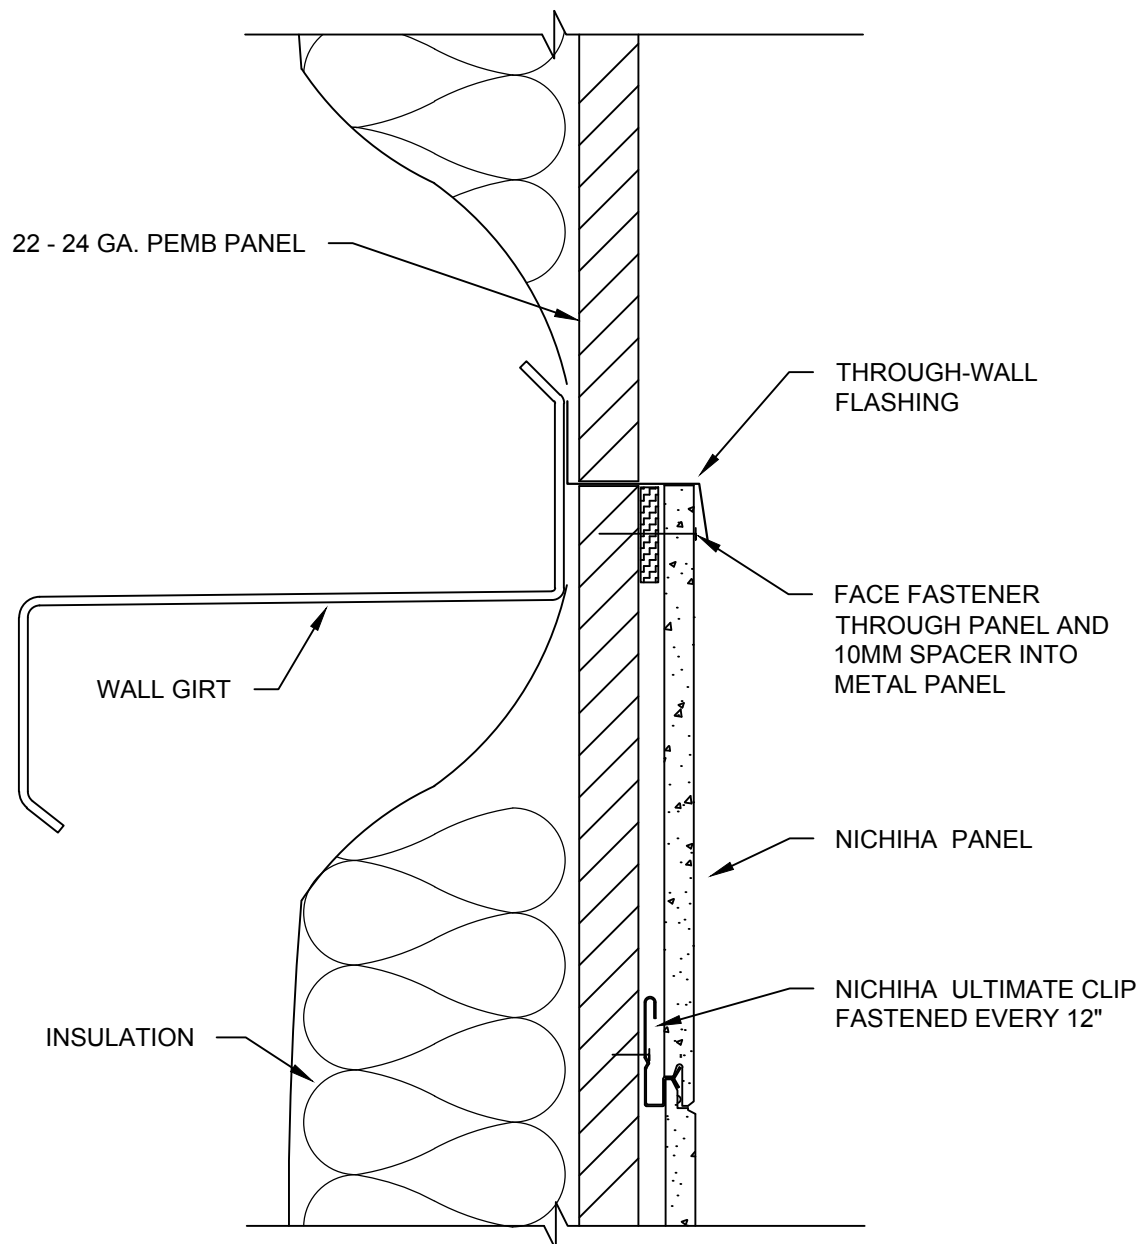

NICHHA - HORIZONTAL AWP - PEMB - HORIZONTAL MATERIAL TRANSITION

SCALE: 3" = 1'-0"