


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHHA PANEL REPRESENTED HERE IS $\frac{5}{8}$ " NICHHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHHA PRODUCT THICKNESSES.
3. MINIMUM 24 GA. METAL PEMB PANELS.
4. PEMB MANUFACTURER TO DETERMINE GIRT ELEVATION/SPACING.
5. NICHHA DEFLECTION CRITERIA FOR METAL PANELS: L/120.
6. FASTEN NICHHA CLIPS, STARTER TRACK, AND FACE FASTENERS @ 12" O.C. WITH #10 SCREWS.
7. NICHHA STANDARD J-MOLD TRIM DEPICTED WITH PEMB JAMB TRIM IN TANDEM. ALTERNATIVELY, USE CUSTOM J TRIM ACCOUNTING FOR PEMB PANEL AND NICHHA SYSTEM THICKNESS. DEPENDING ON PANEL PROFILE, NICHHA SYSTEM DEPTH RANGES FROM 26-31MM.

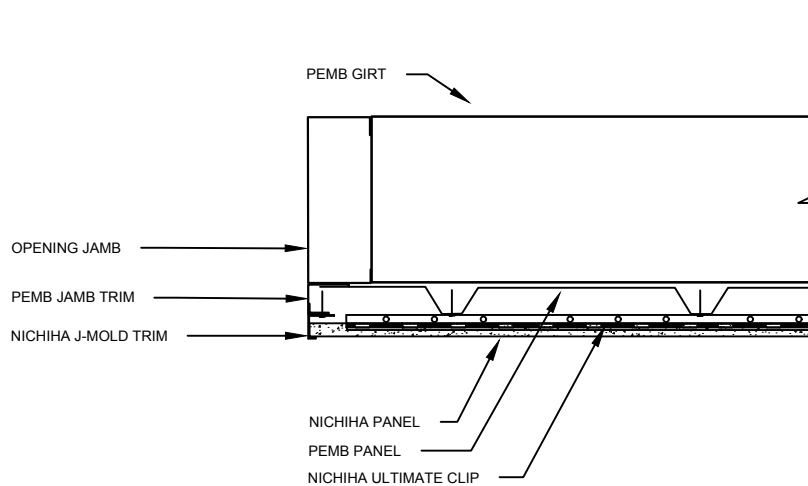

NICHHA - AWP HORIZONTAL- PEMB - OPENING JAMB

SCALE: 1" = 1'-0"