


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHIIHA PRODUCTS.
ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHIIHA PANEL REPRESENTED HERE IS $\frac{5}{8}$ " NICHIIHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHIIHA PRODUCT THICKNESSES.
3. MINIMUM 24 GA. METAL R PANELS.
4. PEMB MANUFACTURER TO DETERMINE GIRT ELEVATION/SPACING.
5. NICHIIHA DEFLECTION CRITERIA FOR METAL PANELS: $L/120$.
6. FASTEN NICHIIHA CLIPS, STARTER TRACK, AND FACE FASTENERS @ 12" O.C. WITH #10 SCREWS.

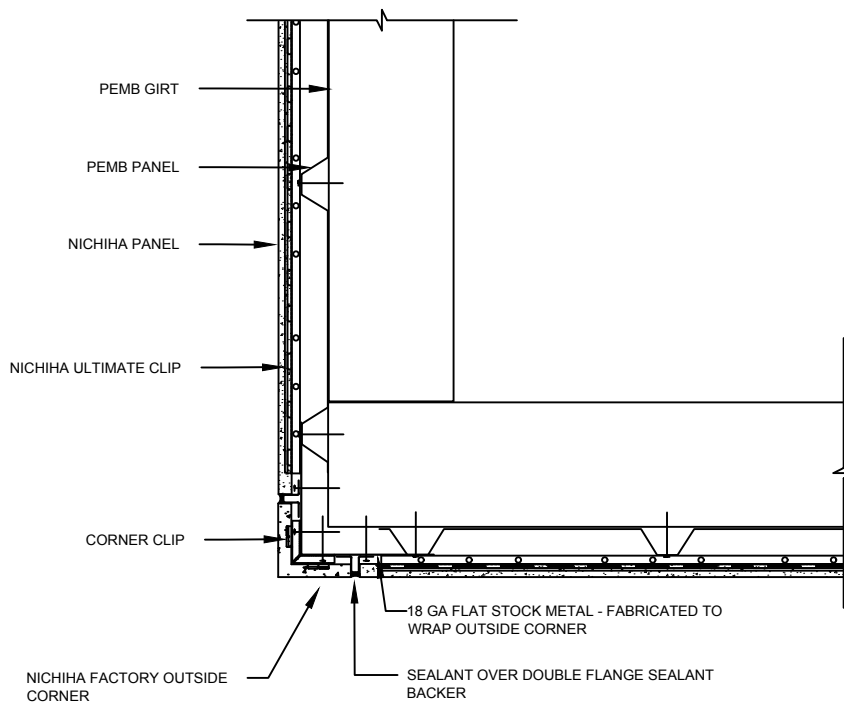

NICHIIHA - AWP HORIZONTAL - PEMB - OUTSIDE CORNER - FACTORY CORNER

SCALE: 1" = 1'-0"