


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHHA PANEL REPRESENTED HERE IS $\frac{5}{8}$ " NICHHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHHA PRODUCT THICKNESSES.
3. MINIMUM 24 GA. METAL PEMB PANELS.
4. PEMB MANUFACTURER TO DETERMINE GIRT ELEVATION/SPACING.
5. NICHHA DEFLECTION CRITERIA FOR METAL PANELS: $L/120$.
6. FASTEN NICHHA CLIPS, STARTER TRACK, AND FACE FASTENERS @ 12" O.C. WITH #10 SCREWS.
7. MITER CUT PANEL EDGES TO FIT FULLY WITHIN CORNER KEY TRIM IN LIGHT CONTACT.
8. REFER TO AWP HORIZONTAL INSTALL GUIDE FOR EXPANSION JOINT REQUIREMENTS ASSOCIATED WITH METAL TRIM OUTSIDE CORNERS AND AWP-1818.

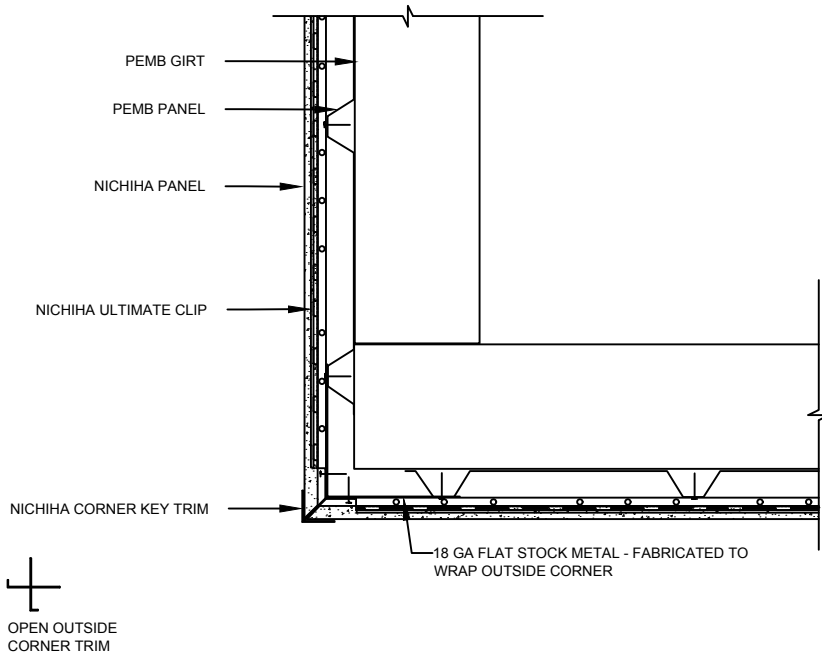

NICHHA - AWP HORIZONTAL- PEMB - OUTSIDE CORNER - METAL TRIM

SCALE: 1" = 1'-0"