


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHHA PANEL REPRESENTED HERE IS 5/8" NICHHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHHA PRODUCT THICKNESSES.
3. SHEATHING REPRESENTED HERE IS 1/2" EXTERIOR GYPSUM. IF USING OTHER THICKNESSES ADJUST ACCORDINGLY. A CODE APPROVED WEATHER RESISTANT BARRIER IS REQUIRED. PLACE PER LOCAL CODE.
5. REFER TO THE CONTINUOUS INSULATION SECTION OF THE NICHHA INSTALLATION GUIDE FOR HORIZONTAL AWP. CONSULT A STRUCTURAL ENGINEER TO DESIGN THE FURRING SYSTEM TO MANAGE LOADING REQUIREMENTS.
6. H-MOLD TRIM IS PRIMARILY AN ALTERNATIVE TO DOUBLE FLANGE SEALANT BACKER FOR AWP-3030 VERTICAL JOINTS.

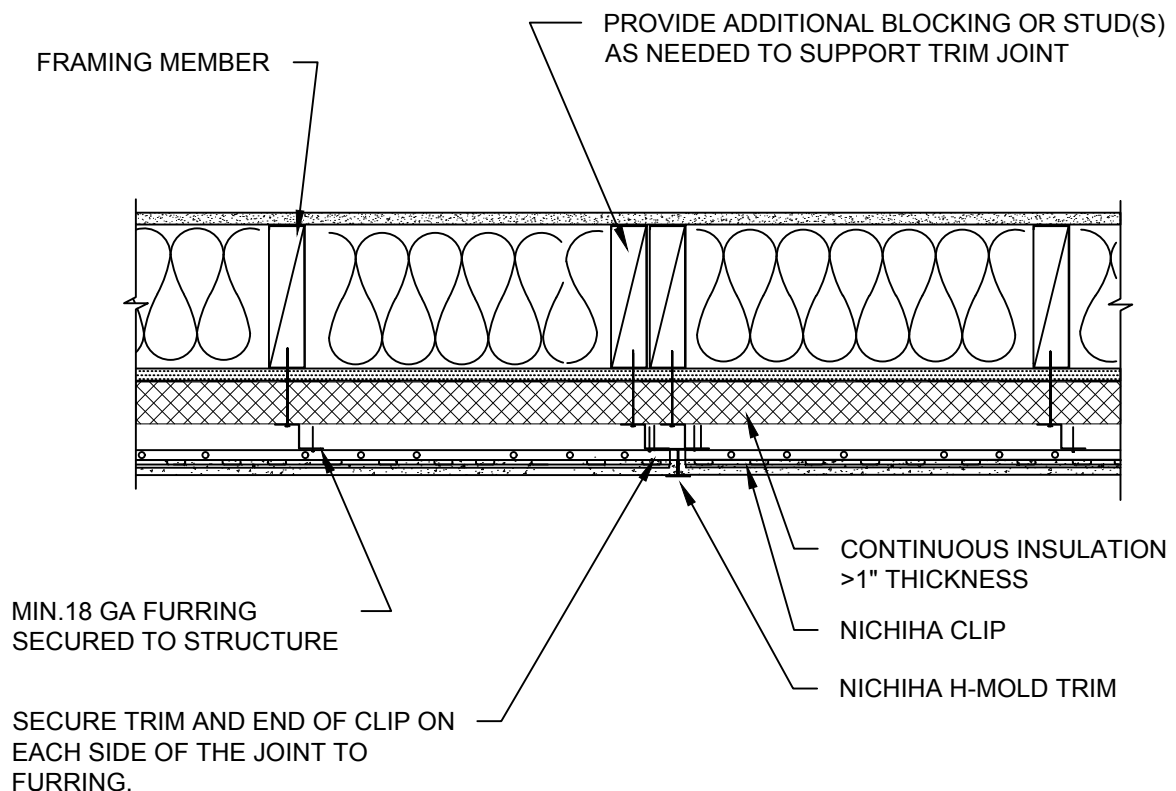

NICHHA HORIZONTAL AWP - CONTINUOUS INSULATION WITH FURRING -
H-MOLD TRIM JOINT DETAIL

SCALE: 1 1/2" = 1'-0"