


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHIIHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHIIHA PANEL REPRESENTED HERE IS 5/8" NICHIIHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHIIHA PRODUCT THICKNESSES.
3. DISTANCE BETWEEN EDGES OF PANELS SHOWN MUST BE A MINIMUM OF 1/2" CLEARANCE.
3. SHEATHING REPRESENTED HERE IS 1/2" EXTERIOR GYPSUM. IF USING OTHER THICKNESSES ADJUST ACCORDINGLY. A CODE APPROVED WEATHER RESISTANT BARRIER IS REQUIRED. PLACE PER LOCAL CODE.
5. REFER TO THE CONTINUOUS INSULATION SECTION OF THE NICHIIHA INSTALLATION GUIDE - HORIZONTAL AWP. CONSULT A STRUCTURAL ENGINEER TO DESIGN THE FURRING SYSTEM TO MANAGE LOADING REQUIREMENTS.
6. REFER TO THE HORIZONTAL AWP INSTALL GUIDE FOR COMPRESSION JOINT REQUIREMENTS.

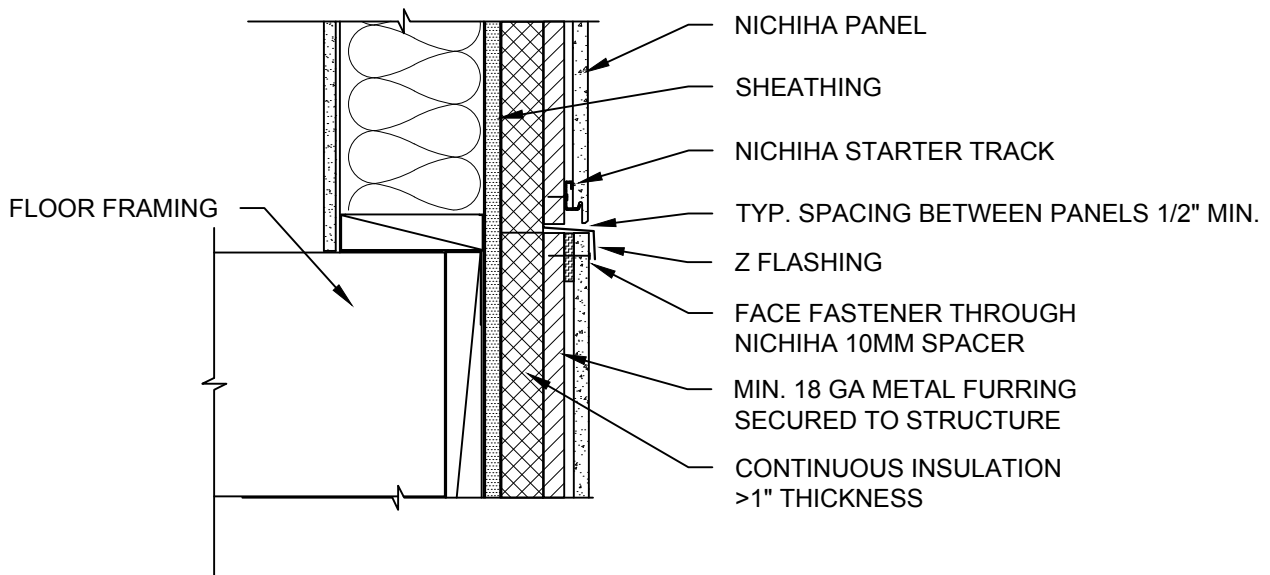

NICHIIHA HORIZONTAL AWP - CONTINUOUS INSULATION WITH FURRING
- HORIZONTAL COMPRESSION JOINT

SCALE: 1/2" = 1'-0"