


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHHA PANEL REPRESENTED HERE IS 5/8" NICHHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHHA PRODUCT THICKNESSES.
3. SHEATHING REPRESENTED HERE IS 1/2" EXTERIOR GYPSUM WALLBOARD, IF USING OSB OR PLYWOOD ADJUST ACCORDINGLY. NICHHA REQUIRES A WEATHER RESISTANT BARRIER. PLACE PER LOCAL CODE.
4. METAL FRAMING/FURRING MEMBERS MUST BE A MINIMUM OF 18 GA, SPACING MAX. 16" O.C.
5. REFER TO THE CONTINUOUS INSULATION SECTION OF THE NICHHA INSTALLATION GUIDE - HORIZONTAL AWP. CONSULT A STRUCTURAL ENGINEER TO DESIGN THE FURRING SYSTEM TO MANAGE LOADING REQUIREMENTS.

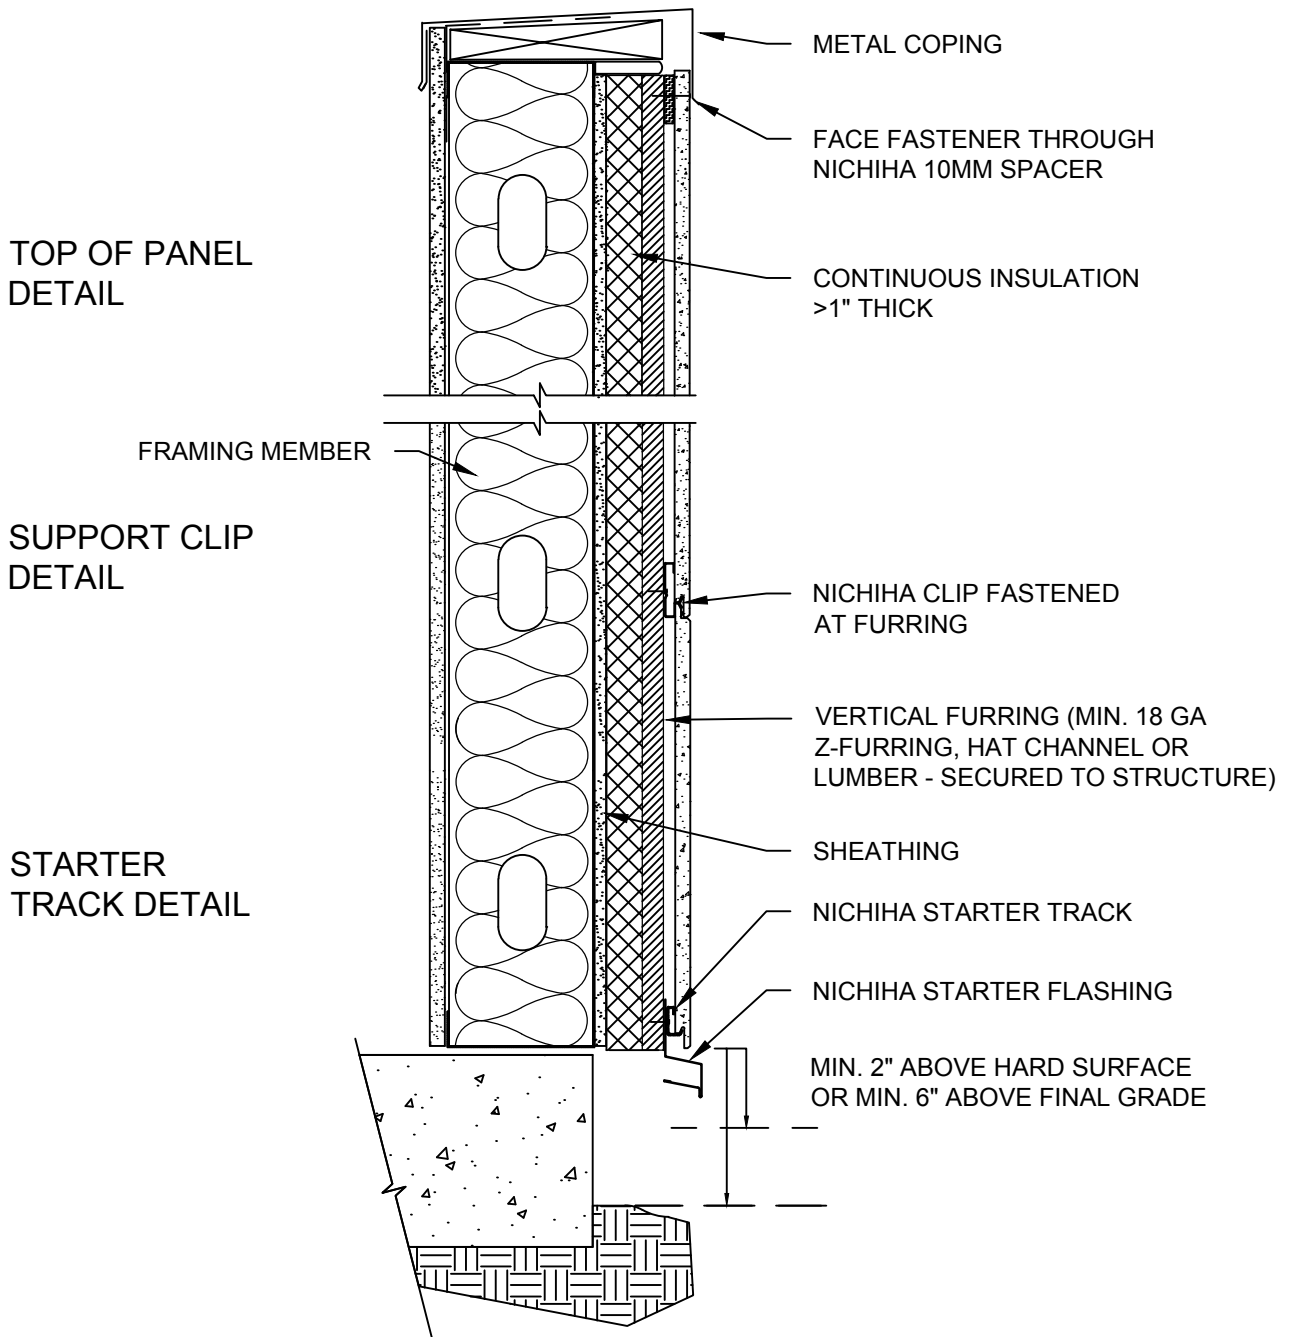

NICHHA - HORIZONTAL AWP - CONTINUOUS INSULATION WITH FURRING - TYPICAL WALL SECTION - PARAPET

SCALE: 1 1/2" = 1'-0"