


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHHA PANEL REPRESENTED HERE IS 5/8" NICHHA PRODUCT, ADJUST ACCORDINGLY FOR OTHER NICHHA PRODUCT THICKNESSES.
3. SHEATHING REPRESENTED HERE IS  $\frac{5}{8}$ " EXTERIOR GYPSUM. A CODE APPROVED WEATHER RESISTANT BARRIER IS REQUIRED. PLACE PER LOCAL CODE.
4. REFER TO THE CONTINUOUS INSULATION SECTION IN THE NICHHA INSTALLATION GUIDE - HORIZONTAL AWP. CONSULT A STRUCTURAL ENGINEER TO DESIGN THE FURRING SYSTEM TO MANAGE LOADING REQUIREMENTS.
6. FOLLOW WRB AND WINDOW MANUFACTURERS' INSTRUCTIONS WITH RESPECT TO MOISTURE MANAGEMENT BEST PRACTICES.

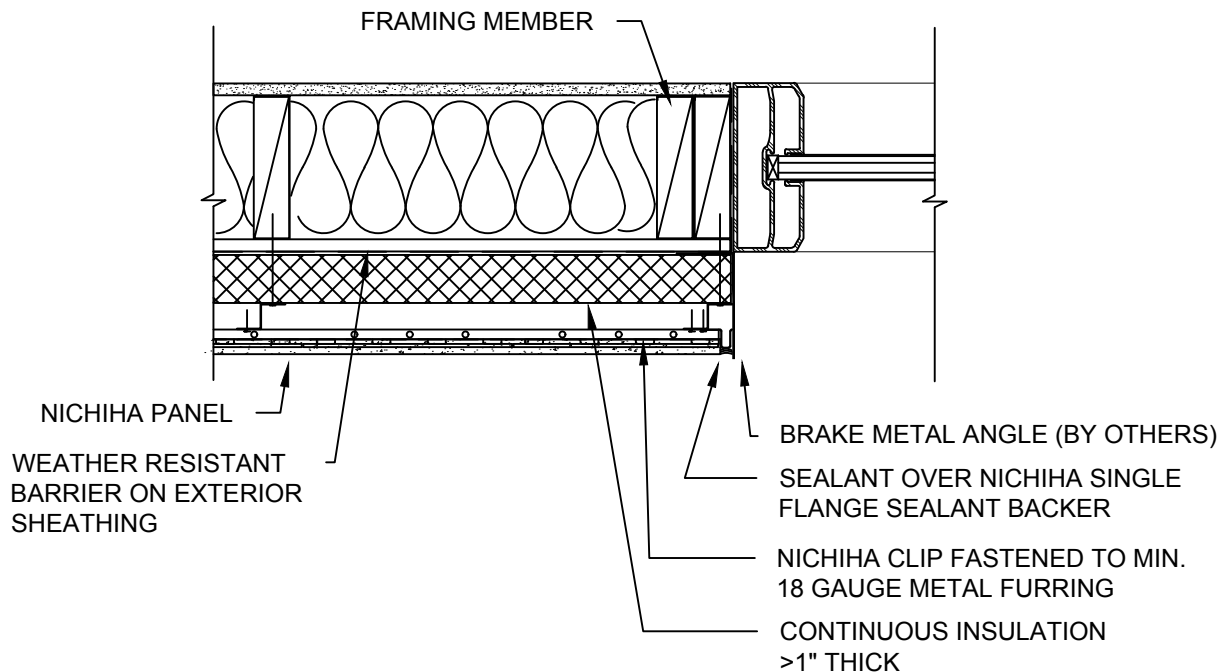

NICHHA HORIZONTAL AWP - CONTINUOUS INSULATION WITH FURRING - WINDOW JAMB - BRAKE METAL DETAIL

SCALE:  $1\frac{1}{2}$ " = 1'-0"