


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. DISTANCE BETWEEN PANEL EDGES SHOWN MUST BE A MINIMUM OF 1/2" CLEARANCE. KEEP MIN. 1/4" CLEARANCE ABOVE FLASHING.
3. NICHHA PANEL REPRESENTED HERE IS 5/8" PRODUCT, ADJUST ACCORDINGLY FOR OTHER PRODUCT THICKNESSES.
4. FURRING IS REQUIRED FOR AWP INSTALLATION TO CONCRETE & CMU. 2x LUMBER OR SHAPED METAL.
5. METAL FURRING CHANNEL MUST BE C-STUD, "Z", OR HAT CHANNEL AND MUST BE A MINIMUM OF 18 GA.
6. COMPLY WITH LOCAL BUILDING CODE REQUIREMENTS FOR WRB.
7. DETAIL DATE: 06-21-2019

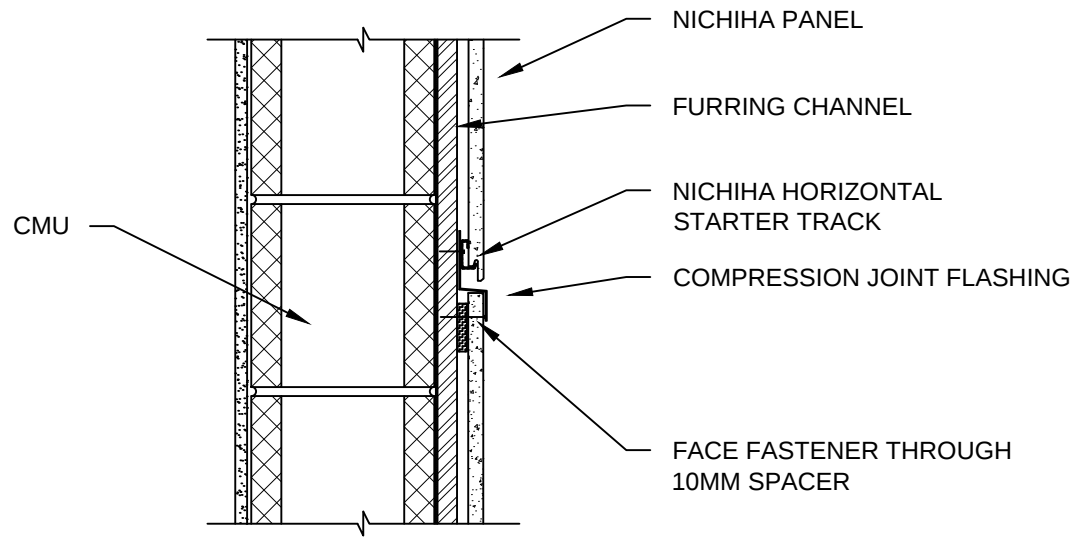

NICHHA - HORIZONTAL AWP - CMU WITH FURRING -
HORIZONTAL COMPRESSION JOINT DETAIL

SCALE: 1 1/2" = 1'-0"