


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHIIHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. STRUCTURAL SHEATHING REQUIRED FOR KURASTONE INSTALLATION (REPRESENTED HERE IS 1/2" PLYWOOD OR 7/16" OSB (IF USING OTHER THICKNESSES ADJUST ACCORDINGLY).
3. SEAL ALL CUT PANEL EDGES WITH EXTERIOR ACRYLIC LATEX PAINT.
4. INSIDE RETURN DIMENSION OF A KURASTONE CORNER IS 125mm (~5") ON THE SHORT LEG AND 295mm (~11-5/8") INSIDE THE LONG LEG.

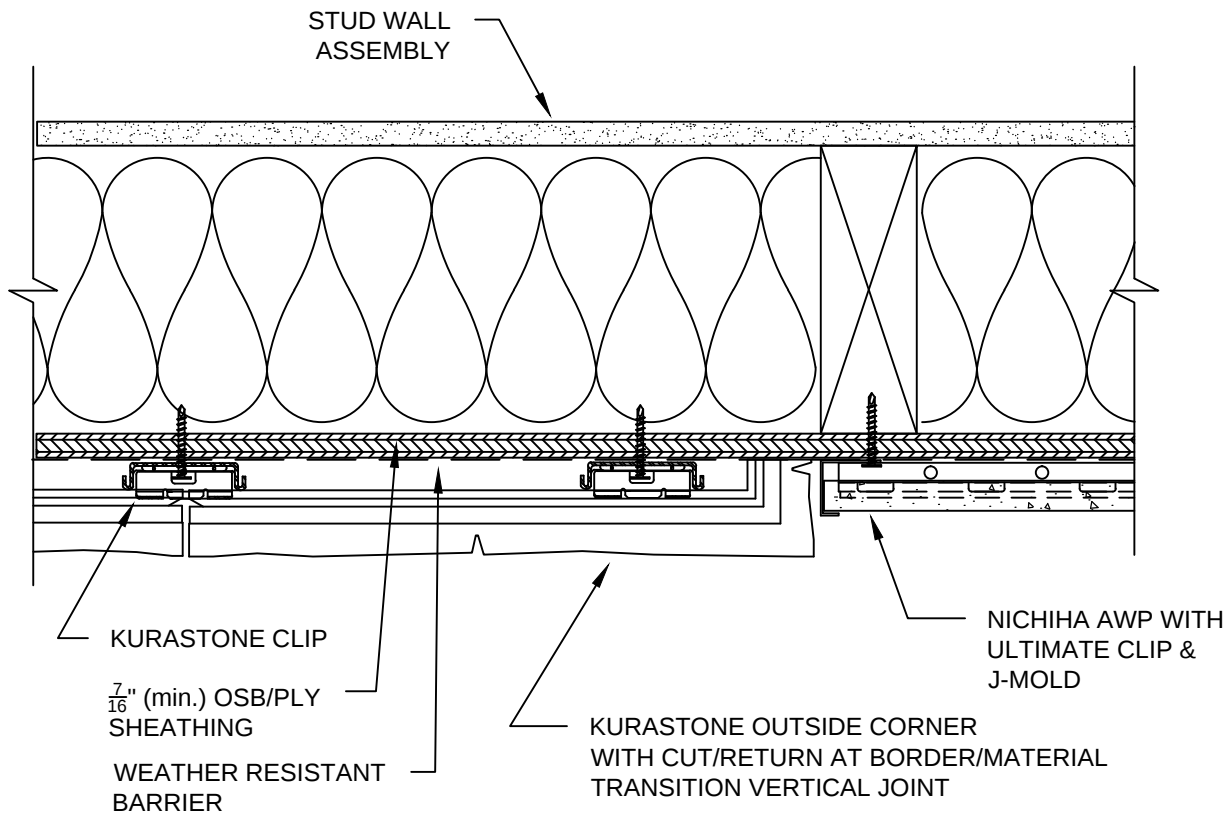

NICHIIHA - KURASTONE - VERTICAL TRANSITION JOINT
WITH MODIFIED FACTORY CORNER

SCALE: 3" = 1'-0"