


NOTES:

1. THIS CONCEPTUAL DETAIL IS A GUIDE FOR INSTALLATION OF NICHHA PRODUCTS. ARCHITECTS/ENGINEERS/CONTRACTORS ARE RESPONSIBLE FOR SUCCESSFUL APPLICATION WHICH DEPENDS UPON SUBSTRATE DESIGN AND CONSTRUCTION BUILT IN ACCORDANCE WITH BEST PRACTICES AND LOCAL BUILDING CODES.
2. NICHHA PANEL REPRESENTED HERE IS 5/8" PRODUCT, ADJUST ACCORDINGLY FOR OTHER PRODUCT THICKNESSES.
3. FURRING IS REQUIRED FOR AWP INSTALLATION TO CONCRETE & CMU. 2x LUMBER OR SHAPED METAL.
4. METAL FURRING CHANNEL MUST BE C-STUD, "Z", OR HAT CHANNEL AND MUST BE A MINIMUM OF 18 GA.
5. COMPLY WITH LOCAL BUILDING CODE REQUIREMENTS FOR WRB.
6. DETAIL DATE: 06-21-2019

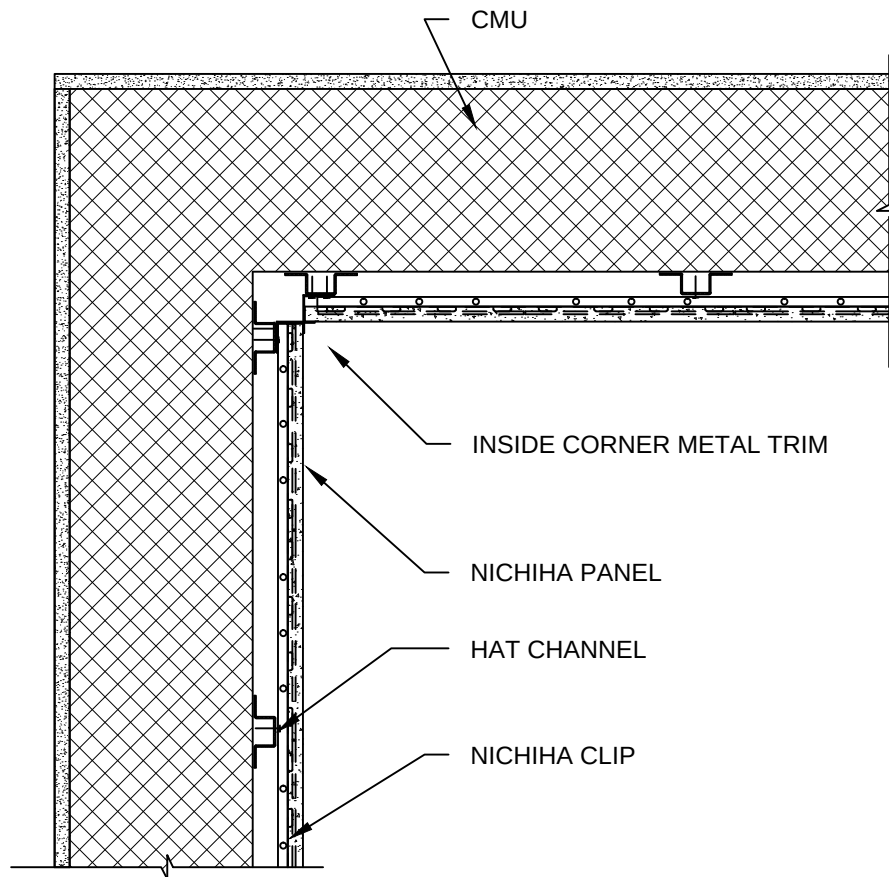

NICHHA - AWP HORIZONTAL - CMU WITH FURRING -
INSIDE CORNER - METAL TRIM

SCALE: 1 1/2" = 1'-0"